



EV Charging Solutions Provider

GridLink

Up to 194 kW



Product Overview

GridLink is a DC charger with an integrated Energy Storage System (ESS) that utilizes lithium-ion batteries. Equipped with both local and remote Energy Management Systems (EMS), it enables operators to benefit from peak shaving and offers enhanced flexibility for ancillary grid services through its bidirectional capability. The ESS integration supports high-power charging with substantially lower input requirements. GridLink's slim, modern design fits a wide range of applications, including parking lots, commercial centers, EV experience zones, fleet depots, charging hubs, and more. Designed for flexibility and serviceability, it allows easy access for maintenance and support.

Key Highlights



High Power Efficiency with Minimal Grid Input

Leverage a powerful 194 kW energy output from the storage system with just 44 kW AC input from the grid, maximizing energy efficiency and reducing dependency on traditional power sources.



Peak Shaving & Smart Load Management

Optimize energy costs with bidirectional AC/DC power modules that intelligently balance supply and demand by storing excess energy and delivering power back to the grid when needed.



Grid Resilience & Uninterrupted Backup Power

Ensure continuous power supply to critical infrastructure, buildings, and essential equipment during outages, keeping operations running smoothly.



Modular, Flexible & Scalable Design

Adapt to evolving energy needs with a plug-and-play system that allows for easy expansion and seamless integration into various applications.



Advanced Safety & Reliability

Equipped with multi-layer thermal runaway protection, fire detection, and rapid response systems, ensuring the highest level of safety and reliability.



Seamless Renewable Energy Integration

Maximize sustainability with built-in photovoltaic (PV) functionality, offering up to 30 kW, allowing direct solar energy storage for a greener, more self-sufficient power solution.

Innovative In-house Battery Solution



Battery Highlights



Pack-Level Fire Suppression

Each pack is equipped with 4 sensors (CO, H₂, air pressure, and light) and features 3 security levels. It supports early warning and automated response, with the world's first built-in water tank for enhanced safety.



SoC Active Balancing at the Cell Level

Utilizes unique active balancing technology at the cell level, transferring energy from higher to lower cells with a 10A current, maximizing efficiency and ensuring more stable performance.



Advanced Temperature Control

Equipped with a triple-layer side liquid cooling system, providing 2.38 times more heat dissipation surface than competitors, efficiently maintaining a constant temperature of 37°C.



Unparalleled Safety

Built to meet leading safety standards—including UL 1973 and NFPA 855 (2023). Gas concentration is maintained below 25% LFL, aligned with NFPA 69 for fire prevention.



Easy Maintenance with Pack-Level Replacement



Designed for easy maintenance, enabling straightforward pack-level replacement.



High-Power Performance (Up to 1C)

Delivers fast 1C charge/discharge rates, reducing the number of battery packs required and maximizing return on investment.

System Overview

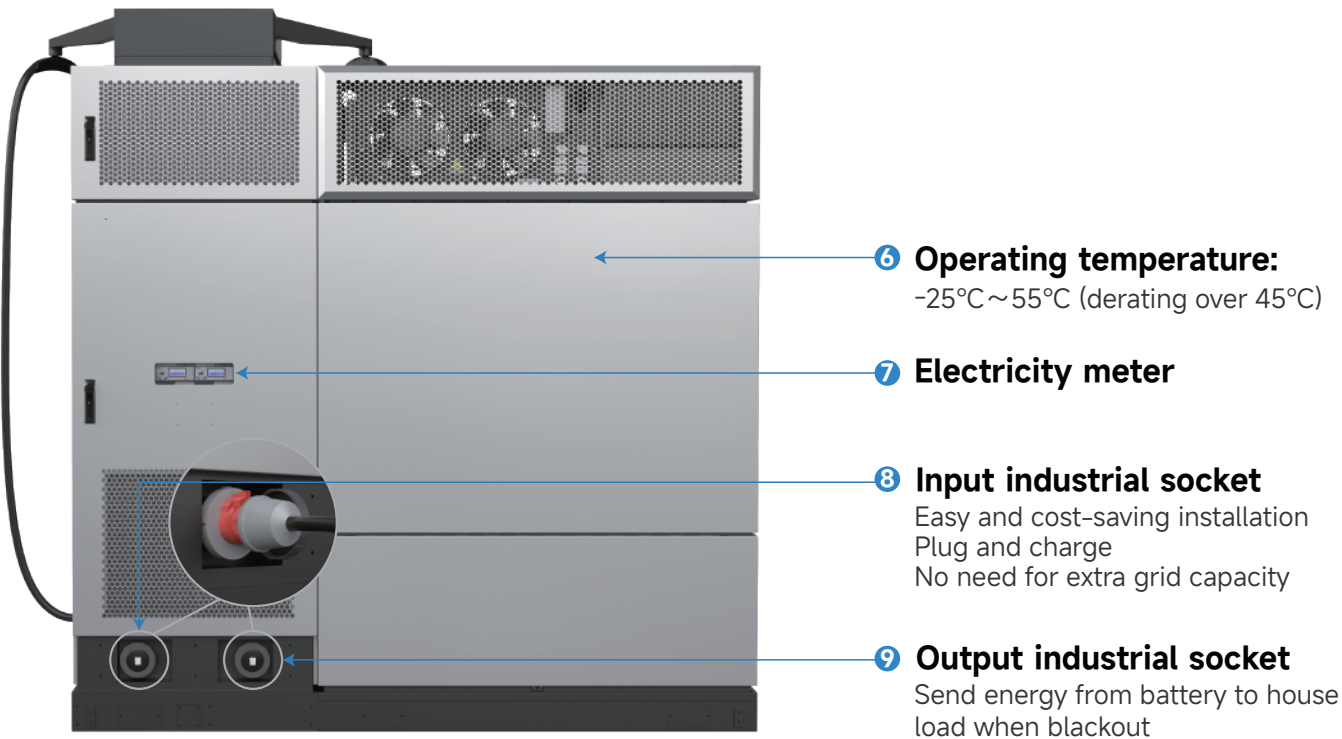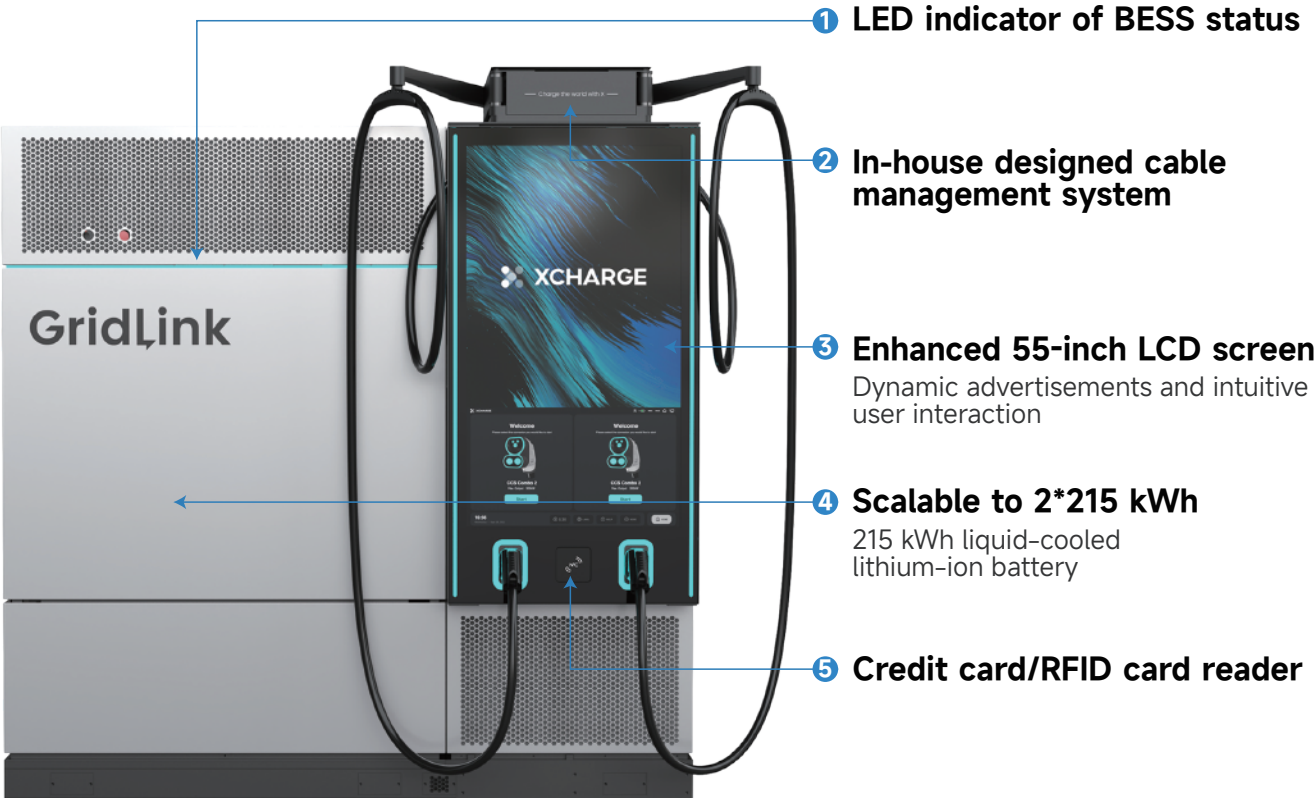

	DC Max.	Up To
GridLink	150 kW + 22 kW / 44 kW = 172 kW / 194 kW	194 kW



Technical Specifications

Battery integrated compact charging station 194 kW with 215 kWh energy storage (ESS extendable)


GridLink				
Basic Parameter	Product Specification	Type	DC charging station	
		Dimension(w*d*h)	Cable management and metal base	2236*970*2080 mm (Not included) 2236*1014*2366 mm (Included)
		Installation	Floor type	
		Material	Industrial grade alloy	
		Color	Silver	
		Weight	3600 kg	
	Energy-Storage-System	Cell Type	LFP	
		Rated Energy	215 kWh / 2*215 kWh	
		Max. Recharge Power	22/44 kW	
		Battery Charging Rate	≤0.5C	
		Battery Discharge Rate	≤1C	
	Charging System	Battery Efficiency	≥94.5% under nominal situation	
		Connectors	2	
		Charging Power	DC Max. 194 kW	
		Power Distribution	2 connectors intelligent distribution	
	Meter	Efficiency	≥96.5%	
		AC Side	AC meter	
	Cooling System	DC Side	2-access DC meter	
		Battery Cooling	Liquid-cooled	
		Power Modules	Air-cooled	
	Fire Suppression System	Cable Cooling	Air-cooled	
		Payment System	Water	
	Connectivity		RFID, credit card	
	Communication		GSM & LTE & LAN	
	Applicable Site		OCPP 1.6J / OCPP 2.0.1	
Environment Parameter	Ambient Temperature		Outdoors	
	Humidity		-25°C~55°C (Over 45 °C derating)	
	Altitude		≤95%, no condensation	
	Noise Emission		≤2000m	
	EMC Emission		≤75dB under nominal situation	
	Medium		Class A	
	Interference		No explosive hazardous materials; No toxic & harmful gases.	
Input & Output	AC Side Voltage		Without strong vibration and shock; No strong electromagnetic interference	
	Input Frequency (AC)		3-phase 400V _{AC} ±10%	
	DC Voltage Range		50/60 Hz	
	DC Constant-Power Voltage Range		150-1000 VDC	
	Nominal Power Output (Rectifying Mode)		300-1000 VDC	
	Nominal Power Output (Off-Grid Mode)		194 kW	
	Nominal Power Output (To-Grid Mode)		150 kW	
Additional Function	Photovoltaics		44 kW (Including auxiliary power consumption)	
	Off-Grid Function		Max. 375A CCS2 continuously (boost 500A), optional 250A CCS2 continuously (boost 400A); Max. 646A for whole charger	
Safety	IP Ranking		Input voltage range: 300-740 VDC Max power input: 30 kW	
	Safety Protection		Able to charge EV when blackout; Able to provide energy to an AC load when blackout	
Standard	Battery		IP54	
	System Level		Input protection, Overcurrent protection, Lightning protection, Over-temperature protection, Output over-voltage protection, Fan protection, Short circuit protection, Emergency button, Flood protection, Ground protection, Dumping protection, Smoke protection	
Standard	Battery		IEC 62619, IEC63056, IEC 60730, EN 62477-1, EN 61000-2/-4, IEC 62933-5-2	
	System Level		IEC 62619, IEC61851, IEC62477, IEC61000, ISO15118	

Mechanical Dimensions

Unit: mm

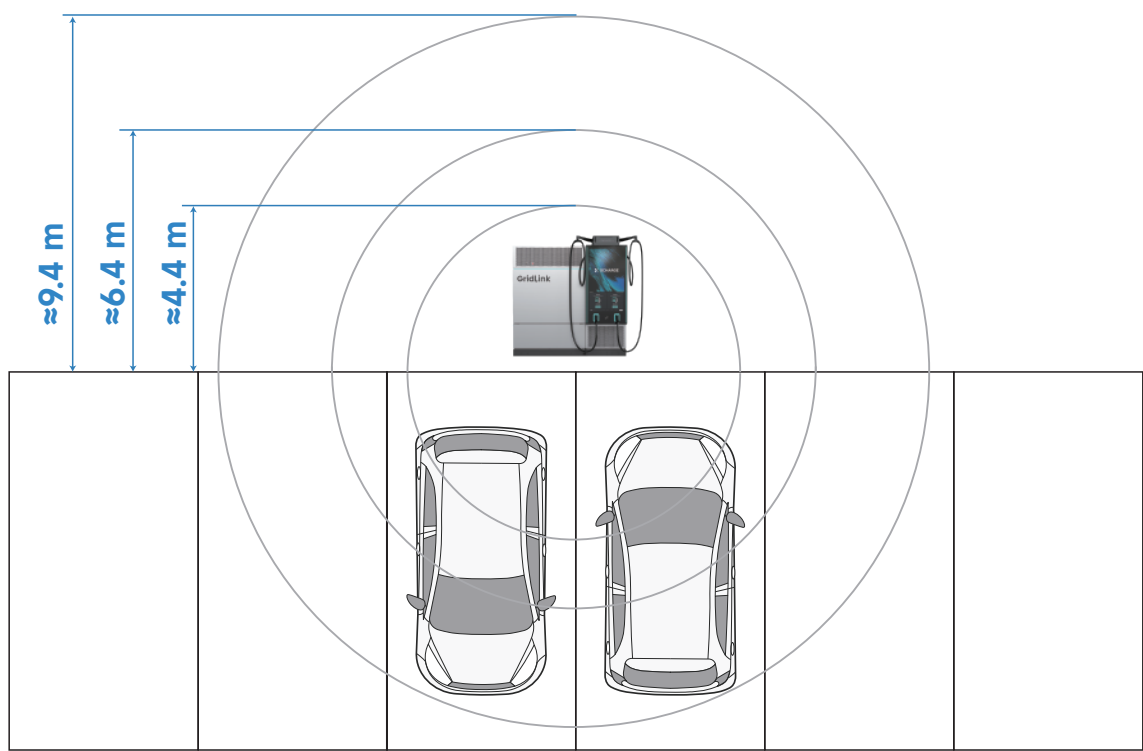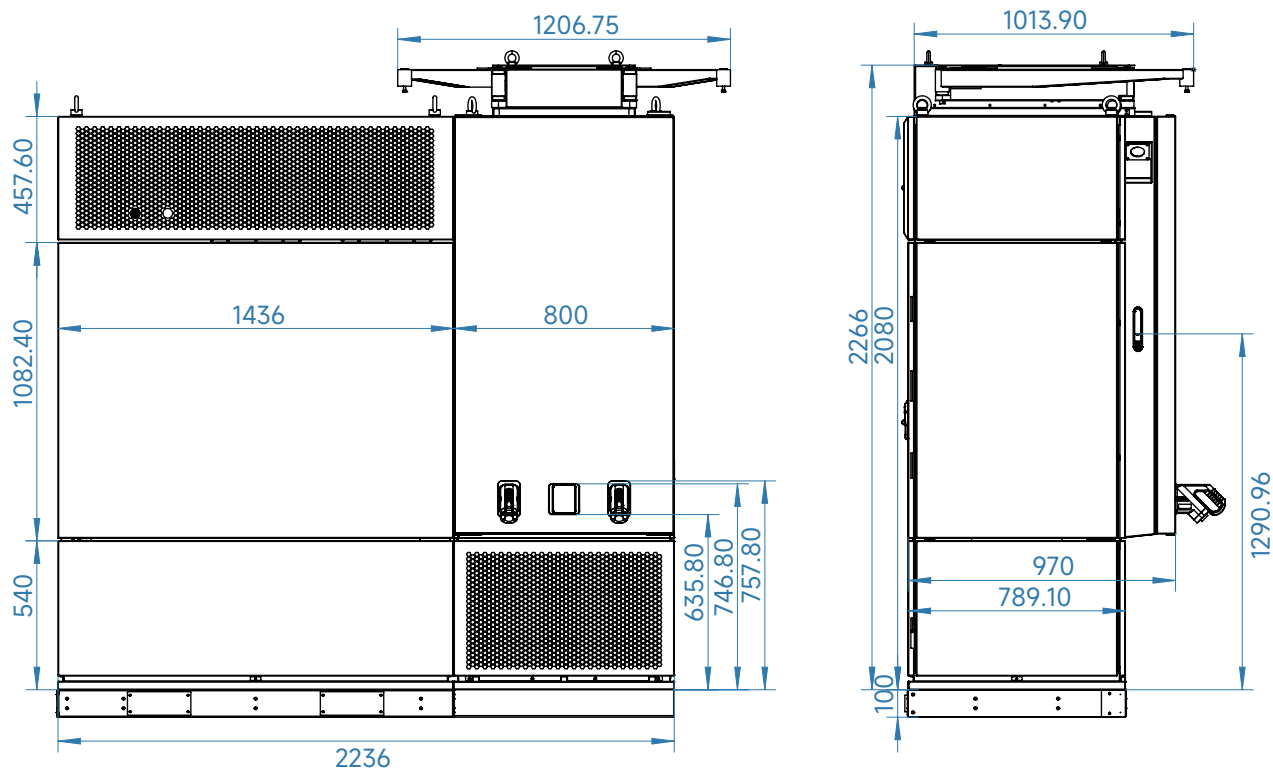

Output Power Curve

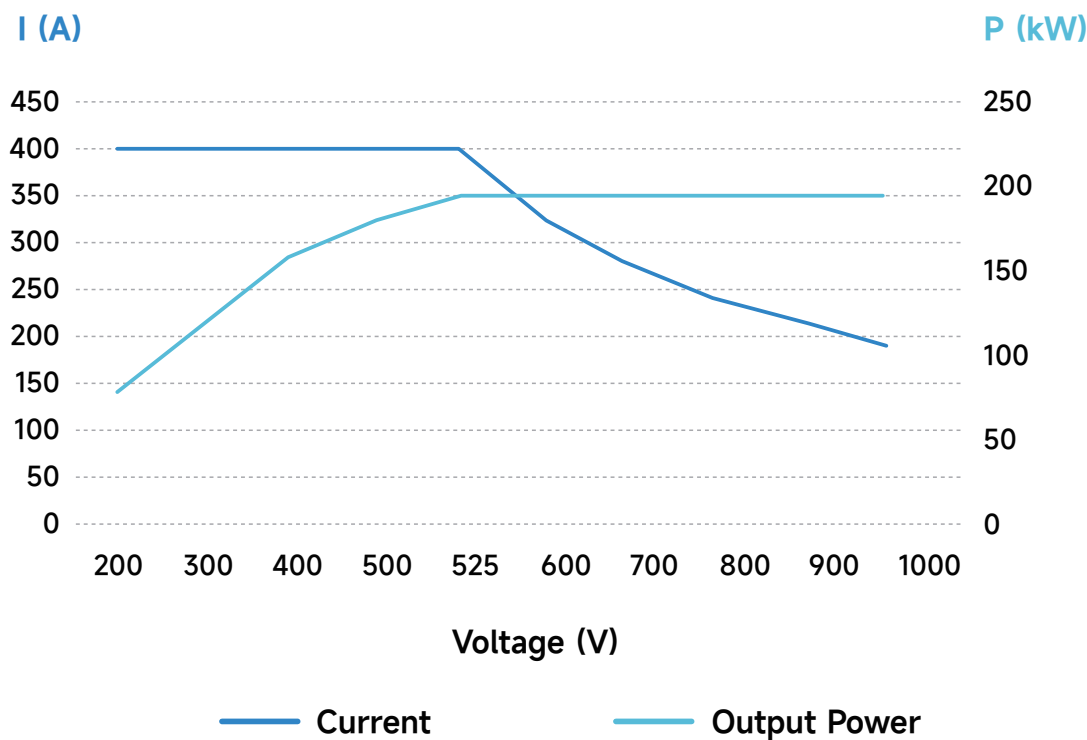

MORE INFORMATION:

PowerStorage Solutions
M: +31 6242 218 06
E: xaviervanderputten@powerstoragesolutions.nl
www.powerstoragesolutions.nl